

# PRODUCT DATASHEET

## Rechargeable LED Safety Light



### WRRRCNM3G

#### BRIGHT

- Two White LEDs provide 14 lumens of light in high mode
- Ample illumination to light the way in emergency situations



#### ECONOMICAL

- Provides useable light for an hour and 15 minutes in high mode
- LEDs never need replacing
- No batteries to replace



#### HANDY

- Compact size hugs the wall when plugged in
- Can function as nightlight or path light
- Three modes – high for bright light, low for longer-lasting light and nightlight for security



#### SAFE

- Comes on when the power goes out
- UL and cUL listed
- Overcharge protected so it can be left plugged in all the time



Slim and compact, the Energizer® Weatherready™ Rechargeable LED Safety Light provides reassurance in both everyday use and emergency situations. When the power goes out, this plug-in light comes on, helping you locate it easily. It will provide light for an hour and 15 minutes on high and two and a half hours on low. When plugged in, the light features a nightlight that is bright enough to be used as a path light. This light has overcharge protection; it can be left plugged in at all times without harming the battery or the light.



**Before Using Your Flashlight:**  
Please read all instructions and cautionary markings on the package and light

#### Product Detail:

**Designation:** Energizer  
Weather Ready Rechargeable LED Safety Light

**Model:** WRRRCNM3G

**Color:** White and Silver

**Power Source:** One 1.2V, 280mAh NiMH button cell

**Lamp:** Three White LEDs

**Lamp Life (hr):** Lifetime

**Mode:**

High	Low
14	8
1:15	2:30
12	9
36	20

**Typical Weight:** 112.5 grams  
with on-board battery pack


**Dimensions (mm):** 29 x 48 x 124

*\* Run Time when fully charged according to package directions*

#### Performance:

##### Run Time

Continuous Drain to  
End of Useable Light (21° C)

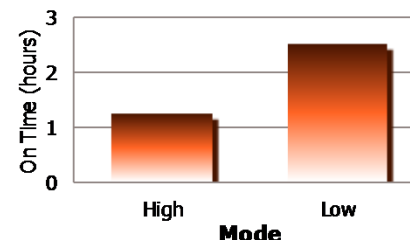

*Tested according to ANSI/NEMA FL 1 Standards.*

#### Important Notice

This datasheet contains information specific to products manufactured at the time of its publication

**Contents herein do not constitute a warranty**

©Energizer / All Rights Reserved

